
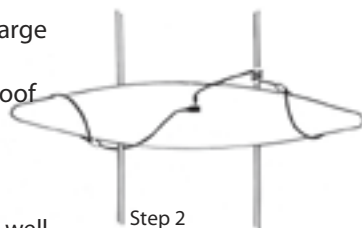


Installation is simple ...

1. Secure boat on any standard rooftop rack according to manufacturer's directions. Be sure that your roof racks are locked to the vehicle. Loop Lasso ends around bow and stern of boat, with cable running under the rack.
2. Wrap Lasso around rack to tighten. Pull the large loop as far down the boat as possible before taking up the slack around the bars of your roof rack. Then secure the cable lock.

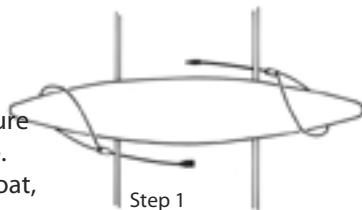


Lasso Security Cables work with many touring kayaks to help keep the hatch covers secure as well.

You can use your Lasso to secure your kayak to any stationary object.

To change default combination:

1. Turn combination to default setting (0000) and disengage cable lock.
2. Grasp barrel mechanism firmly and turn 90° clockwise while holding number tumblers in place. (See Fig. 1)
3. Adjust number tumblers to set desired combination. (Write down your combination and store it in a secure place.)
4. Hold number tumblers in place and turn barrel mechanism 90° counter-clockwise. (See Fig. 2)

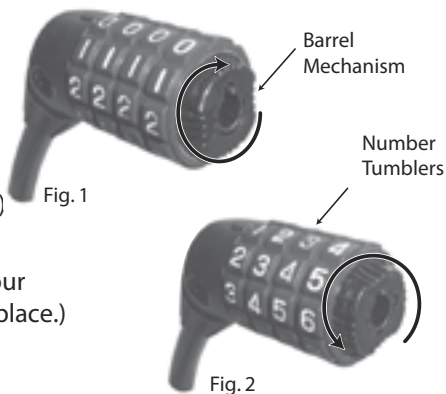

Lasso Security Cables

P.O. Box 5135, Arcata, CA 95518 USA (707) 498-9905

www.LassoSecurityCables.com lasso@starband.net